

WEBCON 2026

System requirements


1. Prerequisites	2
1.1. Hardware	2
1.1.1. Architecture – individual components are covered in chapter 9	2
1.1.2. Technology Stack – all the technologies used by the platform	3
1.2. Software.....	3
1.3. Minimum requirements – “All-in-one installation”	3
1.4. Recommended installation – example for small installations up to 1 000 users.....	4
1.5. Recommended installation – example for large installations over 10 000 users	6
2. High availability.....	8
3. WEBCON BPS databases	9
3.1. Overview	9
3.2. Estimation of WEBCON BPS database size.....	9
4. Disaster-recovery scenario.....	13
5. Good practices in WEBCON BPS platform maintenance.	14
5.1. Database maintenance.....	14
5.2. Resources monitoring.	14
5.3. Service monitoring.....	14
6. WEBCON BPS Farm internal/external communication diagram	15
7. List of basic components.....	16
7.1. WEBCON BPS Portal components	16
7.2. WEBCON BPS SharePoint Solution components	17
7.3. Shared components – business logic libraries.....	18
7.4. WEBCON BPS Background Service	18
7.5. Additional components	19

1. Prerequisites

1.1. Hardware

1.1.1. Architecture – individual components are covered in chapter 9


WEBCON BPS Architecture

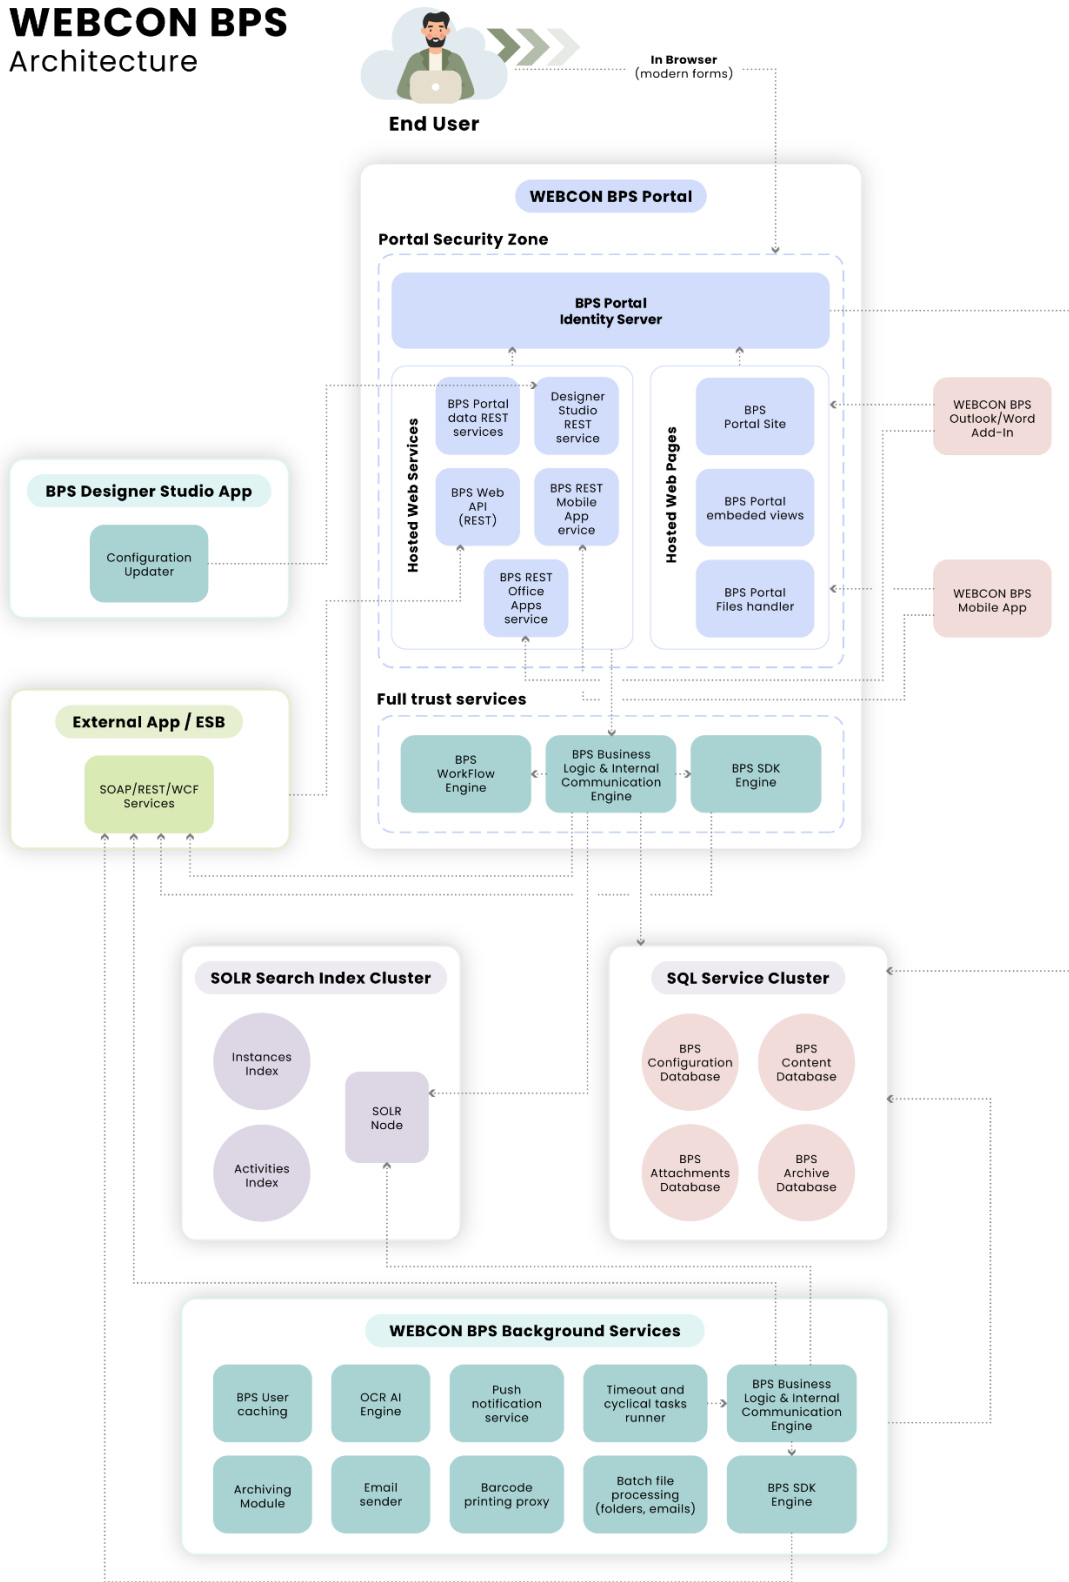

There are 3 basic scenarios for installing WEBCON BPS depending on the scale of your system:

1. Minimal installation – for test, demo and small (up to 10 end users) production environments
2. Recommended installation – for production environments
3. Adding extra servers, redundancy, etc.

1.1.2. Technology Stack – all the technologies used by the platform

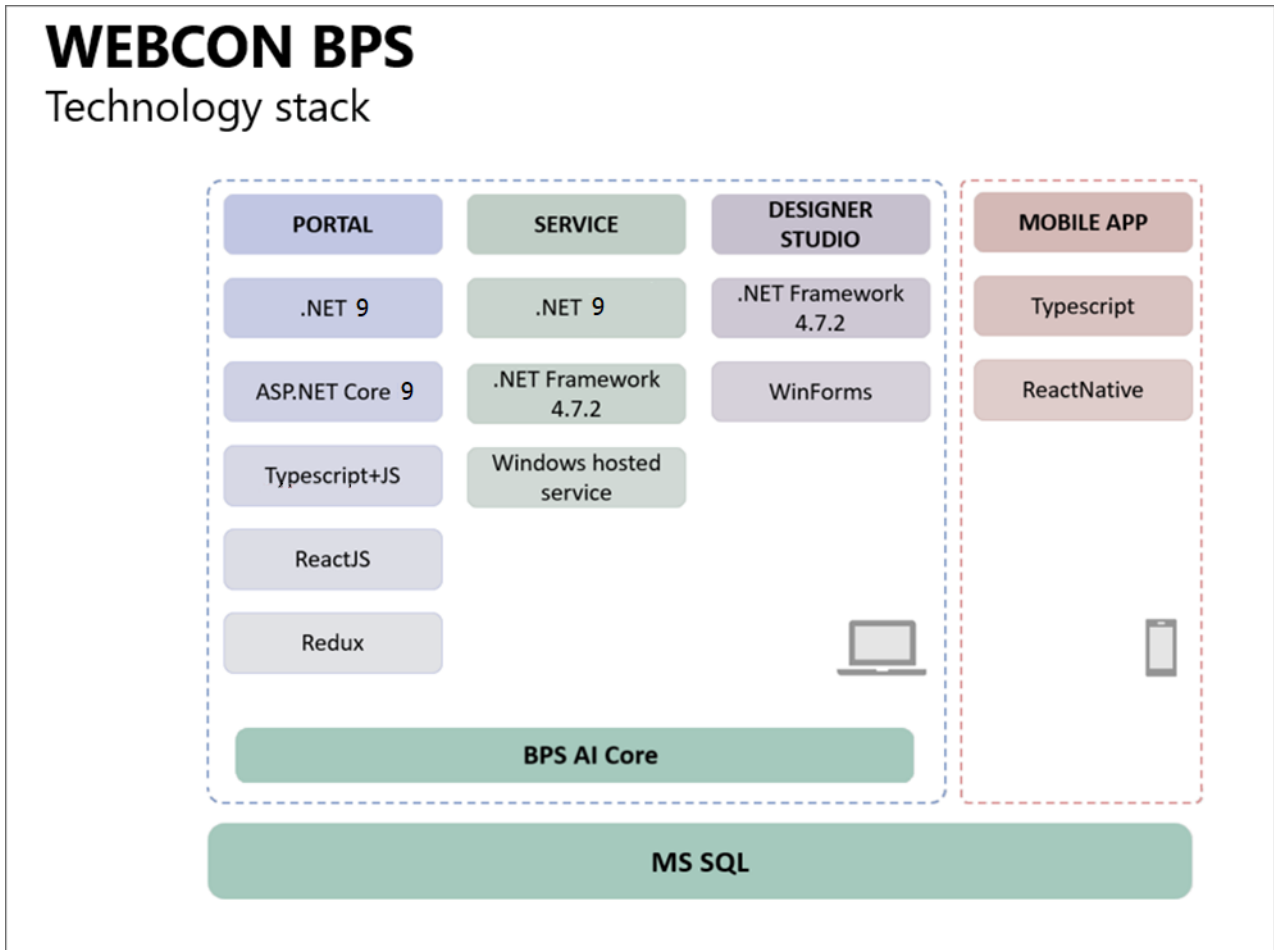

BPS AI Core is an optional module and requires separate licenses.

1.2. Software

- Windows Server 2016 or newer
- MS SQL Server 2019 or higher (**full text search mode required**)
- Active Directory or Azure Active Directory or OpenID service as authentication provider

1.3. Minimum requirements – “All-in-one installation”

For the simplest and most compact WEBCON BPS configuration, one may use a single machine with the following:

- Windows Server 2016 or newer
- SQL Server 2019 Express with Advanced Services (Full Search component is necessary)
- Configured authentication provider supported by WEBCON BPS.




Diagram of „all-in-one“ WEBCON BPS installation

Installation scenario	Deployment time and scale	RAM*	Processor	Hard Drive
Single Windows 2016 (or newer) server that uses SQL Server	Development or evaluation installation	20GB	64-bit, 4 cores	100 GB for system drive

*It is recommended to use at least 24GB of RAM.

1.4. Recommended installation – example for small installations up to 1 000 users

Recommended system requirements for WEBCON BPS assume two separate servers for MS SQL and Windows Web Server (IIS). Diagram of sample setup below:

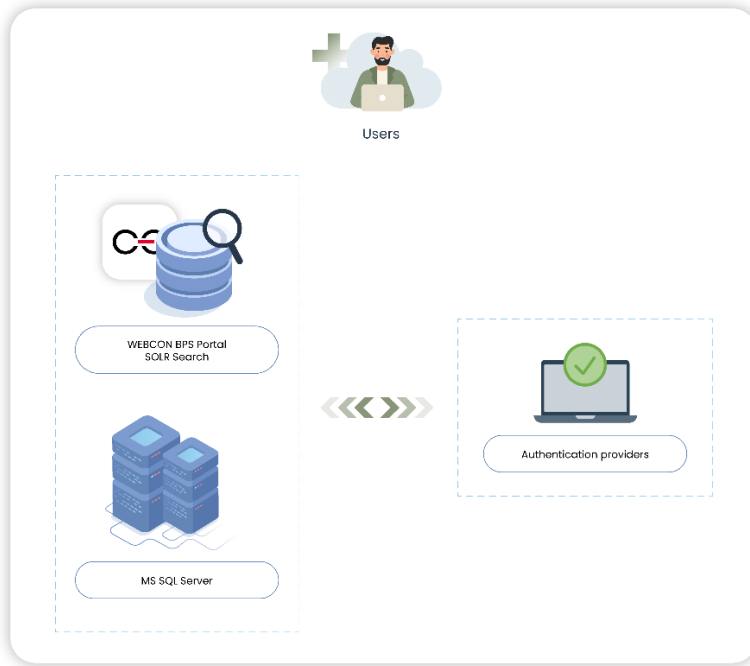

Recommended configuration for WEBCON BPS installation – up to 1000 users

Suggested parameters for both servers:

Database server

System	Database	Processor	RAM	Hard drive
Windows 2016 (or newer)	SQL 2019 Server Standard (or newer)	64-bit, 4 cores	32 GB (minimum); 1/3 of database size (optimal)	- Storage for system files (RAID1): 140GB - Fast HDD for TEMPDB database: 100GB - Fast HDD (RAID10) for data files (size depends on number of workflow instances): 200GB

WEBCON BPS Portal Server

System	Processor	RAM	Hard drive
Windows 2016 (or newer)	64-bit, 4 cores	20GB (minimum); 24GB (recommended)	Storage for system files (RAID1) 140GB Storage for SOLR Search indexes (200GB)

Notes:

- All WEBCON BPS components will be installed on WINDOWS IIS server (except the databases).

1.5. Recommended installation – example for large installations over 10 000 users

The system can be scaled-up to support over 10 000 users by allotting additional resources to the following areas:

- Increase the number of Windows Web Server (IIS) front-ends to improve the number of web browser client requests that your system can handle. It is recommended to have at least one IIS front-end for every 5 000 users.
- Improve SQL server performance and efficiency by adding more RAM, increasing processing power, and most importantly, improving the performance of your disk array (e.g. by using a larger number of more efficient disks).



Sample configuration of an environment intended for more than 10 000 users

WARNING!

Every upgrade should be preceded by comprehensive monitoring and analysis of system parameters, in order to accurately identify and eliminate bottlenecks. This will ensure that your system is scaled-up as efficiently as possible.

Database server

System	Database	Processor	RAM	Hard drive (IBM matrix)
Windows 2016	SQL 2019 Server Enterprise	4 x CPU (8 cores each)	256 GB	- Storage for system files (RAID1): 140GB - Fast SSD for TEMPDB database: 100GB - Fast SSD 3 x RAID10 (200GB + 500GB + 800GB)

WEBCON BPS Portal Server (Windows Server)

Application servers (dedicated) (virtual) - 3 production servers (front-ends available to users)

Each virtual server has the following parameters:

System	Processor	RAM	Hard drive
Windows 2016	4 core	20GB	Storage for system files (RAID1): 140GB

SOLR Search Server

System	Processor	RAM	Hard drive
Windows 2016	4 core	20GB	Storage for system files (RAID1): 100GB Storage for search indexes (RAID1): 400GB

2. High availability

With planning and preparation, WEBCON BPS can operate in high-availability mode.

Here is a breakdown of vital elements which are essential to the availability and reliability of a WEBCON BPS system:

- SQL data bases (solutions like: HA Cluster, Always On Availability Group, Log Shipping) – security policy and available budget are usually the deciding factors when choosing a solution. <https://docs.microsoft.com/en-us/sql/database-engine/sql-server-business-continuity-dr?view=sql-server-ver15>
- Windows Web Server (IIS) – redundancy is achieved by adding extra front-ends to the SharePoint farm (or building IIS Cluster).
- Load balancer has to support sticky session mechanism.
- WEBCON BPS – duplicating the WEBCON BPS service on multiple machines.
- Search service (SOLR) – includes the ability to set up a cluster of SOLR servers that combines fault tolerance and high availability. Called SOLRCloud, these capabilities provide distributed indexing and search capabilities.
https://lucene.apache.org/solr/guide/8_5/solrcloud.html (3 servers minimum)

Depending on the equipment provider and technologies already in place, other solutions can be employed.



3. WEBCON BPS databases

3.1. Overview

The WEBCON BPS platform is based on dedicated MS SQL Server databases.

There are four types of databases employed by WEBCON BPS:

- **Configuration database** – contains information about the configuration of a given installation, e.g. the number and addresses of Frontend servers, search server configuration, installation's authentication providers, information about languages available on WEBCON BPS Portal, etc. One installation will have exactly one configuration database.
- **Content database** (main database) – collects all information about the configuration of applications created on the platform e.g. process definitions, individual form fields and form type configuration, privileges for the individual objects on both the data side and the presentation side. This database also contains all metadata about processes (data entered by users in form fields) and a full history of changes. For a given installation you can create multiple content databases – how many are needed depends on the administration, security, and performance requirements of the platform.
- **Attachments database** – a dedicated database that stores all attachments added to forms (e.g. docx, xlsx, pdf, tiff files). A separate database for storing attachments is created for performance reasons and to better facilitate administration and backup/recovery procedures. One attachments database is created during the standard installation process, but you can create separate databases and assign them to individual processes. While these are optional, they are almost always utilized.
- **Archive database** – If necessary, you can create dedicated archive databases to reduce the strain on content and attachment databases. The system will transfer data from content and attachment databases to the archive database based on defined criteria. Usually some form of data retention cyclical actions that will move instances from end steps (i.e. that have been completed) over to the Archive database.

All databases used by WEBCON BPS are created by the installer, which will automatically set up all necessary parameters required by the platform.

3.2. Estimation of WEBCON BPS database size

With WEBCON BPS, as with other database systems, it is hard to precisely calculate database growth over a certain period of time, as it is dependent on many variables which are hard to define at the start of implementation. The following section aims to

provide a basis for evaluating potential database size growth based on the specifics of the system's core elements.

During database size evaluation, the user must take the following into consideration:

1. Volume of workflow instances registered daily
2. Complexity of the form (number of form fields, item lists)
3. Number of steps in given workflow (every path transition is recorded in the instance's history)
4. Number and type of actions used in the system (e-mails, changing field values, launching sub-workflows)
5. Average size and number of attachments per workflow instance (document scans, docx, pdf, tiff, xlsx)

As an example, we will use a form made up of 20 form fields (all of them are required):

- 3x Choice field (1x dropdown, 1x autocomplete, 1x pop-up search window)
- 3x Date & time
- 3x Floating-point number
- 1x Integer
- 3x Single line of text
- 3x Multiple lines of text
- 2x Person or group picker
- 1x Yes/No choice
- 1 Item list comprised of 5 column and 5 rows:
 - 1x Choice field column
 - 2x Single line of text column
 - 1x Date & time column
 - 1x Floating-point number

The screenshot shows a web form interface with a top navigation bar containing 'Cancel editing', '+ New', 'Save', 'Delete', and 'Refresh'. The main form area is divided into two columns. The left column contains 13 input fields: three single-line text fields, two person or group pickers (both showing 'Tom Green'), three date fields (all showing '11/7/2024'), and three floating-point number fields (showing '1.00', '123.00', and '123.456.00'). The right column contains three panels: 'Task details' with a status of 'Accepted', 'Comments' with an empty text area, and 'Attachments' with a '+ Add attachment' button and a drop zone labeled 'drop attachments or paste image here'.

The screenshot displays a form with several input fields and a table. The form fields include three multiple-line text areas, three choice fields (all set to 'Tom Green'), a 'Yes/No' checkbox, and an integer field (set to '6.543'). Below the form is an 'Item list' table with 5 rows of data and a total row. Each row contains an ID, a choice field picker, two single-line text fields, a date field, and a floating point field. The total row shows a sum of 27,183,915.00 for the floating point column. A '+ Add' button is located at the bottom left of the table area.

ID	Choice field picker	Single line of text 1	Single line of text 2	Date	Floating point
1	Tom Green X ✓ Q	Single line of text	Single line of text	11/7/2024	5,436,783.00
2	Tom Green X ✓ Q	Single line of text	Single line of text	11/7/2024	5,436,783.00
3	Tom Green X ✓ Q	Single line of text	Single line of text	11/7/2024	5,436,783.00
4	Tom Green X ✓ Q	Single line of text	Single line of text	11/7/2024	5,436,783.00
5	Tom Green X ✓ Q	Single line of text	Single line of text	11/7/2024	5,436,783.00
Total					27,183,915.00

For the form shown above, the average size of the workflow instance immediately after registration is equal to 38 kB. Every path transition adds a database entry whose size is 19,6 kB.

Average size of an attachment (one-page scan with 300 dpi resolution) is 280 kB.

Average size of an action execution log is 0,8 kB.

Example:

- We have 1 workflow.
- The workflow has 10 steps
- 100 users work in the system every workday
- Every user registers 10 workflow instances a day
- Every user moves 20 instances by one transition path per a day
- Every workflow instance registration and every path transition triggers a "Send standard email" action.
- System is used for 12 months * 21 workdays = 252 workdays
- Every month, 2500 one-paged scans are added to various instances

Space used by instance registration:

252 (days) * 100 (users) * 10 (instances) * 38 kB (average form size) = **9.58 GB**

Space used by path transitions:

252 (days) * 100 (users) * 20 (transitions) * 19.6 kB = **9.88 GB**

Space used by attachments:

12 (months) * 2500 (pages) * 280 kB (page size) = **8.4 GB**

Space used by action logs:

252 (days) * 100 (users) * 30 (steps/notifications) * 0.8 kB = **604.8 MB**

In total, for this very specific example, the annual database growth is equal to: **28.46 GB**

Warning!

This value is applicable to this specific example and form type only. It is important to remember that with more intricate forms, more actions and more steps, calculations will also get more complex. The real database growth should be verified periodically, for example after a month of system usage

For this example, one paged attachments with a baseline size were used. Calculations should reflect the expected format and size of attachments (multi-page documents in DOCX or building projects in DWG format), as attachments are likely to be the workflow component that requires the largest allocation of disk space.

4. Disaster-recovery scenario

The WEBCON BPS system engine operates based on multiple databases. Therefore, the Disaster Recovery of our system should focus on creating and maintaining backup copies of the aforementioned components.

The WEBCON BPS system will always be made up of at least three databases – One Configuration database, one Process (aka. Content) database and one Attachment database. Optionally, more Process and Attachment databases can be created and connected to the Configuration database if necessary. Either way, all of these BPS system databases should always be backed up because they are essential to the system and store all of the WEBCON BPS data, such as:

- Registered workflow instances
- Workflow attachments
- Process definitions
- Database definitions
- Set substitutions
- Workflow service configuration
- System configuration (e.g. HotFolders, HotMailBoxes, OCR AI Projects)
- All permission settings regarding WEBCON BPS (access to instances, workflows, processes etc.)
- License information
- Translations
- WEBCON BPS Portal presentation (applications, reports, dashboards etc.)

As mentioned above, due to the critical importance of the WEBCON BPS system databases, there should be backup procedures in place for:

- The Configuration database
- All Process databases (also referred to as Content databases)
- All Attachment databases
- All Archive databases (if exists)

<https://docs.microsoft.com/en-us/sql/relational-databases/backup-restore/back-up-and-restore-of-sql-server-databases?view=sql-server-ver15>

It is also important (but not required) to backup (snapshot) machines. In the event of a major failure, we can quickly restore the machine snapshot and then restore WEBCON BPS databases from the latest backup.

5. Good practices in WEBCON BPS platform maintenance.

5.1. Database maintenance.

Basic administrative activities are related to WEBCON BPS databases. They have a key impact on system performance and security:

- Backup and tests of Restore procedures.
- Index maintenance (reorganize and rebuild).
- Statistics updating.

Maintaining indexes and statistics is crucial for system performance. Based on this data, the SQL Server engine generates query execution plans which results directly in query execution time. Daily execution of the above operations in the service window is recommended.

5.2. Resources monitoring.

Similarly to other IT systems, it is advised to monitor basic usage parameters of the resources used by machines that comprise a WEBCON BPS environment. Things that are always worth looking out for are: CPU load, available operating memory, and available disc storage.


5.3. Service monitoring.

The basic services that are necessary for the application to operate are:

- SQL Server service of the instance storing BPS data bases.
- IIS server service
- WEBCON Workflow Service
- WEBCON BPS Search Service
- Portal Application – WebCon BPSCloud Portal

6. WEBCON BPS Farm internal/external communication diagram

To run Designer Studio remotely (from the User menu in Portal), a symmetrical connection with a transfer of at least **100Mb/s** is recommended.

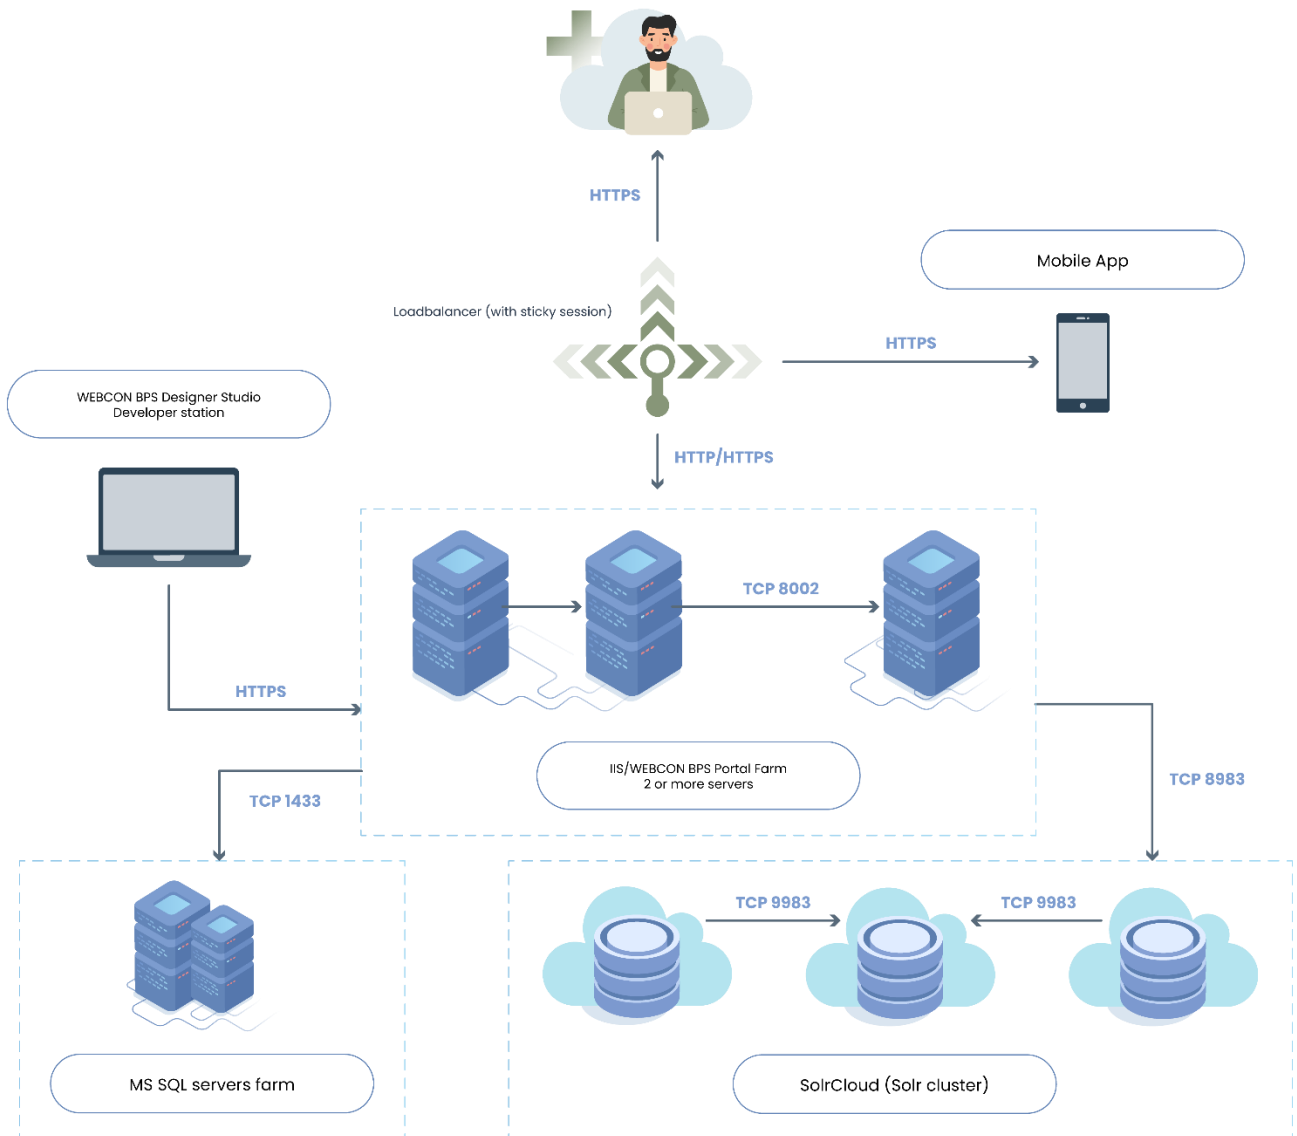

7. List of basic components

Below is a list and short description of components featured in architecture diagrams.

7.1. WEBCON BPS Portal components

The components that are included in WEBCON BPS Portal are responsible for the implementation of two layers of logic in the application – the presentation layer and the business logic layer. The elements of the presentation share an authentication mechanism which works based on configured authentication providers, access to resources in this layer is granted based on the context of current user returned by the authentication provider.

Business logic elements function in Full Trust mode, where the context of the current user is received from components in higher layers, and privileges are verified against configuration in WEBCON BPS databases.

BPS Portal Site – main interface of WEBCON BPS Portal, contains all interface elements that allow the user to access BPS features (reports, dashboards, navigation etc.). Also contains the dynamic form (Modern form) through which users edit workflow instances in the system. Created via React JS technology as a Single Page Application. This component communicates with the rest of the application via dedicated REST web services.

BPS Portal embedded views – responsible for displaying individual user interface elements on WEBCON BPS Portal in embed mode (e.g. report, dashboard, a form of a selected instance). Allows such interface elements to be embedded in a separate IFrame on any web page.

BPS Portal files handler – component responsible for giving users access to downloadable workflow attachments (files). Works as a http handler. This component communicates with the business logic of the application.

BPS Portal data REST services – a set of REST Web services hosted within WEBCON BPS Portal, responsible for handling data intended for websites of the BPS Portal Site component. This component communicates with the business logic of the application, and receives user context from a configured authentication provider.

Designer Studio REST service – a set of REST Web services hosted within WEBCON BPS Portal, responsible for handling incoming communication from the BPS Designer Studio App module. This includes licensing mechanisms, reports from various modules, reading and writing configuration. This component communicates with the business logic of the WEBCON BPS system.

BPS Web API (REST) – a set of REST Web services hosted within WEBCON BPS Portal, responsible for handling requests from external applications. Integral to the functions of the public Web API such as loading and modifying the content of instances, starting new instances, moving workflow instances, loading report data, reading process metadata, and more. Communication with this component is only possible for registered external

applications. Authentication is handled via JWT tokens. This component communicates with the business logic of the WEBCON BPS system.

BPS REST Mobile App service – a set of REST Web services (JSON messages) hosted on WEBCON BPS Portal, responsible for handling data intended for the WEBCON BPS Mobile App. This component communicates with the business logic of the application.

BPS REST Office Apps service – a set of REST Web services (JSON messages) hosted on WEBCON BPS Portal, responsible for handling data intended for the Microsoft Outlook and Word Add-Ins. This component communicates with the business logic of the application.

Communication between components of the WEBCON BPS Portal module is carried it within one system process.

7.2. WEBCON BPS SharePoint Solution components

The components that are included in WEBCON BPS SharePoint Solution are responsible for the implementation of two layers of logic in the application – the presentation layer and the business logic layer.

The presentation layer uses authentication configured in the SharePoint Farm, access to resources in this layer is granted based on the privileges of the current SharePoint user. Business logic elements function in Full Trust mode, where the context of the current user is received from components in higher layers, and privileges are verified against configuration in WEBCON BPS databases.

BPS GUI Web Parts – user interface elements that grant access to WEBCON BPS system features. Contains interface elements that are presented to the end user in the form of SharePoint Web parts. This component communicates with the business logic of the application.

BPS GUI aspx Pages – user interface elements that are presented to the end user in the form of SharePoint sites (aspx pages). Responsible for (among other things) the dynamic form (and classic form) used to edit process instances in the system. This component communicates with the business logic of the application.

BPS GUI Files http handler – component responsible for giving users access to downloadable workflow attachments (files). Works as a http handler. This component communicates with the business logic of the application.

Designers & Service Web service – a set of SOAP Web services hosted on SharePoint, responsible for handling communication from BPS Designer Studio App. This includes operations such as verifying the correct loading of SDK plugins. This component communicates with the business logic of the application.

BPS Web API (SOAP) – a set of SOAP Web services hosted on SharePoint, responsible for handling requests from external applications. Integral to the functions of the public Web API such as loading and modifying the content of instances, starting new instances,

moving workflow instances. This component communicates with the business logic of the application.

7.3. Shared components – business logic libraries

BPS WorkFlow Engine – an engine for processing instances within the system. Responsible for starting and processing instances according to workflow configuration. This component is used by the business logic of the system.

BPS Business Logic & Internal Communication Engine – the main component of the business logic layer. Responsible for handling all logic operations of the workflow and user forms. Prepares and processes data or assigns it to other components of the business logic (BPS WorkFlow Engine, BPS SDK Engine). Also responsible for saving and reading data from the database.

BPS SDK Engine – component responsible for loading registered SDK plugins into processes, applying their configuration, and also invoking individual interfaces used for communicating with these plugins.

Communication between components inside the WEBCON BPS SharePoint Solution module takes place within one system process.

7.4. WEBCON BPS Background Service

Individual components within this module are managed by a common mechanism, which is responsible for cyclically verifying the schedules/configuration and activating other components accordingly.

Each of these components communicates with the WEBCON BPS database in order to download data for processing and to save the result.

BPS User caching – responsible for synchronizing BPS users from the Active Directory and SharePoint, as well as building a cache of this list in the WEBCON BPS database. This component communicates with the Active Directory specified in the configuration, and uses Microsoft system directories available for .NET Framework (System.DirectoryServices). It will also communicate with a SOAP Web service from the Designers & Service Web service component in order to obtain information about SharePoint users.

OCR AI Engine – used to process files with a text layer (.pdf) and find information on them according to the OCR AI project configured in the system.

Timeout and cyclical tasks runner – activates actions defined in processes to trigger cyclically or on timeout. Communicates with a SOAP Web service from the Designers & Service Web service component in order to pass information about operations to be carried out by business logic.

Push notification service – sends push notifications for the WEBCON BPS Mobile App on iOS. When an instance is changed for which a notification should be sent, this component communicates with the Apple Web service and sends it.

Archiving Module – component responsible for archiving workflow instances. Depending on the configuration, it can save archived instances in a shared network location or in a dedicated BPS archive database.

Email sender – component responsible for handling the e-mail sending queue. Messages are sent via the SMTP server configured in the system settings.

Batch file processing (folders, emails) – responsible for processing so-called Hot folders and Hot mailboxes. Hot folders are shared network locations where newly arrived files are processed by the component. Similarly, Hot mailboxes are Exchange inboxes where newly arrived e-mails and their attachments are processed by the component. Depending on the configuration, it either reads from the appropriate network share or connects to the specified Exchange server. It may also attempt to connect to a SOAP Web service from the Designers & Service Web service component in order to – for example – launch a new workflow instance and add the newly processed file as an attachment.

Barcode printing proxy – component responsible for sending printout requests to the configured barcode printers. Depending on the configuration, it can connect to a specified printer and (local TCP/IP connection) and send it printout requests.

7.5. Additional components

Optional components that are not required during WEBCON BPS installation are the WEBCON BPS Mobile App, Add-Ins for Outlook, Word, and Teams. These are intended to be installed by end users when they need them.